



Performance. Power.
Productivity.™

FramePro®751XP

3 1/2" Clipped Head 34° Framing/Sheathing Nailer

The FramePro®751XP nailers are designed with the Pro in mind. XtremePro models have improved internal and external features for improved durability and comfort. These compact framers are easy to handle, and easy on the arm. The 34° short, in-line magazine, provides excellent maneuverability and line of sight. These powerful framers drive a wide range of fasteners in four gauges (.113 – .148) from 2" to 3 1/2" to handle virtually any job.




Specifications

Item#	2J0103N
Sequential actuation trigger	
Reg. Operating Pressure	70-120 psi (4.8 - 8.3 bar)
Air Consumption (60 cycles per min.)	11 scfm
Air Inlet	3/8" NPT
Tool Weight	8.4 lbs (3.8 kg)
Height	14.25" (362 mm)
Length	15.13" (384 mm)
Width	4.17" (106 mm)
Fastener Capacity	70

Fastener Specifications

Shank Diameter113" – .148"
Fastener Range	2" – 3 1/2"
Finish	Bright Basic, Galv. & Stainless
Collation	34° angled taped strip

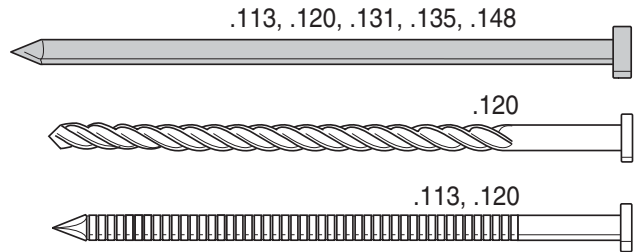

Applications

For framing, truss building, sub flooring, sheathing, decking, wood-to-concrete block, siding, fencing, pallets and crate assembly.

Features and Benefits

- Five-year limited warranty
- Upgraded XtremePro internal features include: anodized sleeve for additional strength and durability; urethane sleeve cap protects sleeve from wear; fixed firing valve improves tool life and speed; and positive stop guide body aligns nail and driver for consistent drive
- Comfort and convenience features include: overmold grip and trigger, 360° adjustable exhaust, rafter hanger and construction ruler
- Aggressive sawtooth safety that really digs in for toenailing
- Straight-line 34° magazine for better line of sight and simple two-step loading
- Last nail lock out – prevents dry firing

Choose the right trigger system for your specific needs! Sequential Actuation Trigger (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation Trigger (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

SENCO®

Performance. Power.
Productivity.™

FramePro® 751XP

Features



Smooth-Shank

Length	Item Code	Carton Count	Finish
2 x .113	M002080	2.5M	Bright
2 x .113	GC21APBK	2.5M	Bright
2 1/4 x .113	GC23APBX	2.5M	Bright
2 1/4 x .113	GC23AHAK	1.1M	Bt. Hardened
2 3/8 x .113	GC24APBX	2.5M	Bright
2 1/2 x .113	GC25APBX	2.5M	Bright
2 3/4 x .120	HC26APBK	3.1M	Bright
3 x .120	HC27APB	3.1M	Bright
3 x .120	HC27APBX	2.5M	Bright
3 x .131	KC27APBX	2.5M	Bright
3 1/4 x .120	HC28APBX	2.5M	Bright
3 1/4 x .131	KC28APBX	2.5M	Bright
3 1/2 x .131	KC29APBX	2.5M	Bright
3 1/2 x .135	LC29APBX	3.0M	Bright
2 x .113	GC21AABK	2.5M	Galv
2 3/8 x .113	GC24ASBK	2.5M	Hot Dip
2 1/2 x .113	GC25AABKN	5.1M	Galv
2 1/2 x .131	KC25AAB	5.1M	Galv
3 x .120	HC27AABX	2.5M	Galv
3 x .131	KC27EDB	1.1M	WeatherX™2
3 x .131	KC27ASBX	2.5M	Hot Dip
3 1/4 x .131	KC28ASBX	2.5M	Hot Dip
3 1/4 x .131	KC28AABX	2.5M	Galv
3 1/2 x .131	KC29ASBX	2.5M	Hot Dip
3 1/2 x .131	KC29AABX	2.5M	Galv
3 x .131	KC27AGBK	1.1M	Stainless
3 1/4 x .131	KC28AGB	1.1M	Stainless

Screw-Shank-Strip

Length	Item Code	Carton Count	Finish
3 x .120	HF27EPAK	3.1M	Bright
3 x .120	HF27ESBK	2.1M	Hot-Dip
3 x .120	HF27EDB	1.1M	WeatherX™2
3 x .120	HF27AGBK	1.1M	Stainless

Ring-Shank

Length	Item Code	Carton Count	Finish
2 x .113	GE21APAK	2.1M	Bright
2 x .113	M002080	2.5M	Bright
2 3/8 x .113	GE24APBX	2.5M	Bright
2 x .113	GE21AAAK	2.1M	Galv
2 x .113	GE21ASBK	2.1M	Hot Dip
2 3/8 x .113	GE24AAAK	1.5M	Galv
2 3/8 x .113	GE24AABX	2.5M	Galv
2 3/8 x .113	GE24ASBX	2.5M	Hot Dip
3 x .120	HE27AABX	2.5M	Galv
3 x .120	HE27ASBX	2.5M	Hot Dip
2 3/8 x .113	GE24AGBK	1.1M	Stainless
3 x .120	HE27AGBK	1.1M	Stainless

SENCO® RoundStrip™ 34° Smooth Round Head Nails

Length	Item Code	Carton Count	Finish
2 3/8 x .113	G524APBX	2.5M	Bright
3 x .120	H527APBX	2.5M	Bright
3 x .131	K527APBX	2.5M	Bright
3 1/4 x .131	K528APBX	2.5M	Bright
3 1/2 x .131	K529APBX	2.5M	Bright
2 x .113	G521ASBK	2.1M	Hot Dip
2 3/8 x .113	G524ASBX	2.5M	Hot Dip
3 x .120	H527ASBX	2.5M	Hot Dip
3 x .131	K527ASBX	2.5M	Hot Dip
3 1/4 x .131	K528ASBX	2.5M	Hot Dip

SENCO® RoundStrip™ 34° Ring Round Head Nails

Length	Item Code	Carton Count	Finish
2 3/8 x .113	G624APBX	2.5M	Bright
3 x .120	H627APBX	2.5M	Bright
2 x .113	G621ASBK	2.1M	Hot Dip
2 3/8 x .113	G624ASBX	2.5M	Hot Dip
3 x .120	H627ASBX	2.5M	Hot Dip
3 x .131	K627ASBX	2.5M	Hot Dip