



The PalletPro™ 90 Heavy Duty Coil Nailer has the power to drive up to 3½" nails into the toughest of woods. Drives smooth, screw and ring shank nails.

Applications:

A powerful and heavy duty tool for boxes and crates, pallets, carton-to-skid, fencing, pallets, packaging, trusses, framing and subflooring.

Features and Benefits:

- Collation – wire weld
- Aluminum mainbody – weighs only 7.7 lbs
- Balanced and powerful for heavy duty applications
- High capacity nylon magazine – fast and easy loading
- Adjustable nail canister accommodates wide range of nails
- Drives up to 3½" nails

Sequential Actuation Trigger (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation Trigger (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.


Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions or log on to www.senco.com or call 1-800-543-4596 for more information on SENCO's trigger systems. Choose the right trigger system for your specific needs!

Tool Specifications:

Item #: 4S0001N Contact Actuation (Dual Action)
 Weight: 7.72 lbs. (3.5 kg)
 Length: 13.98" (355 mm)
 Height: 14.57" (370 mm)
 Nail Capacity: 300
 Operating Pressure: 70-120 psig (4.8-8.3 bar)
 Mode of Operation: Tool is available with either sequential or contact actuation trigger mechanism.
 Hose Fitting: 3/8" NPT

Fastener Specifications:

Drives full round head coil nails from 1½" - 3½" smooth, screw and ring shank nails, .099 - .148 diameter.

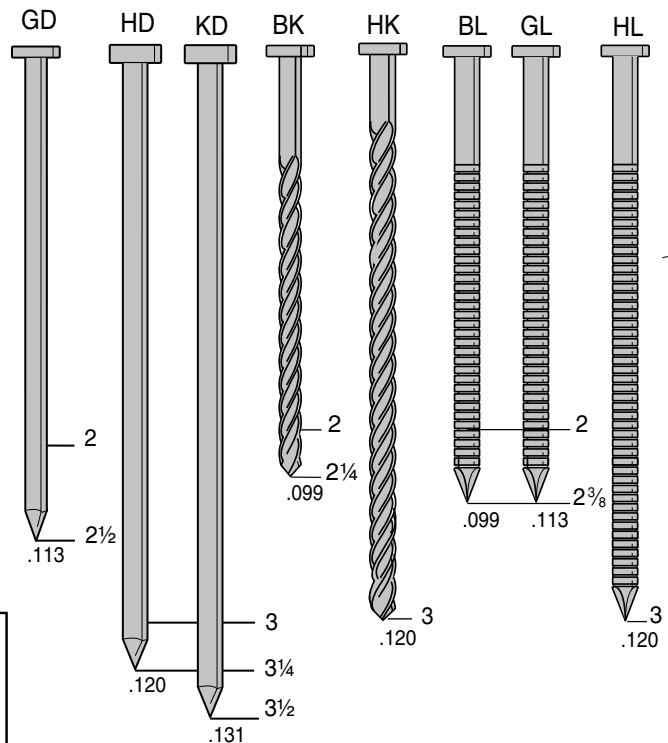

For additional information on how SENCO will save you time, reduce costs, and increase quality, call us at 1-800-543-4596 to find your nearest Authorized Senco Dealer or Distributor or visit our web site at: www.senco.com