

AIR MANIFOLDS

A.S.M.E. CERTIFIED

EACH MODEL MEETS ALL OSHA REQUIREMENTS

Use with our
NEW Moisture
Separating Systems
for Clean, Dry Air



We have the right size for your needs.

| MODEL # | CAPACITY | WEIGHT (lb) | HEIGHT | LENGTH | TANK DIAMETER | WIDTH w/ FITTINGS | INLET SIZE | NO. OF OUTLETS | OUTLET SIZE (Qty) | WORKING PRESSURE (psi) | TEST PRESSURE (psi) | CONNECTOR DETAILS |
|----------|-------------|-------------|--|--------|---------------|----------------------|------------|----------------|------------------------------|---------------------------|------------------------|---|
| TX-2AMF | 15 Gallon | 63 | 18" | 39" | 12" | 22" | 2" | 8 | 3/4" | 200 | 260 | INLET: 4-Prong crowfoot. OUTLETS: Safety auto exhaust ball valve w/ locking handle & 2-Prong crowfoot |
| TX-3AMF | 2.5 Gallon | 21-23 | 12" | 20" | 8" | 14" | 1" | 4 | 1/2" | 200 | 260 | INLET: 2-Prong crowfoot. OUTLETS: Safety auto exhaust ball valve w/ locking handle & 2-Prong crowfoot, Quick connect models available with 1/4", 3/8" & 1/2" fittings |
| TX-4AMF | 30 Gallon | 115 | 27" | 44" | 16" | 36" | 3" | 8 | 3/4" (2) 1" (4) 2" (2) | 200 | 260 | INLET: 4-Prong crowfoot. OUTLETS: Safety auto exhaust ball valve w/ locking handle & 2-Prong crowfoot & 4-Prong crowfoot |
| TX-5AMF | 60 Gallon | 193 | 31" | 54" | 20" | 39" | 3" | 8 | 3/4" (2) 1" (4) 2" (2) | 200 | 260 | INLET: 4-Prong crowfoot. OUTLETS: Safety auto exhaust ball valve w/ locking handle & 2-Prong crowfoot & 4-Prong crowfoot |
| TX-6AMF | 10 Gallon | 51 | 16" | 36" | 10" | 20" | 2" | 8 | 3/4" | 150 | 195 | INLET: 4-Prong crowfoot. OUTLETS: Safety auto exhaust ball valve w/ locking handle & 2-Prong crowfoot. California permit exempt. |
| TX-10099 | Safety Cage | 137 | For use with TX-2AMF & TX-6AMF. Protects valves from breakage. Round design allows one person to roll unit into place. Can be stacked for storage. Galvanized for long life. | | | | | | | | | Manifolds can be custom configured with many other type fittings. |

www.airtools.com


Email: tptinfo@airtools.com

TEXAS
1-800-231-9740
254-587-2533 (Int'l calls)

NEVADA
1-800-858-1222

VIRGINIA
1-800-626-1091

MICHIGAN
1-877-575-5733

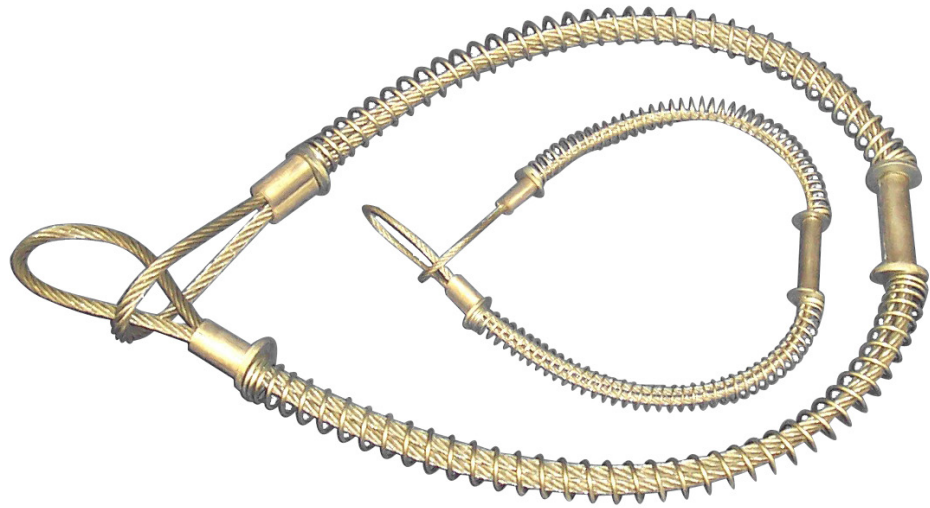

**Safety Lock Cables
TX-SLC1 & TX-SLC2**



Air Flow Check Valves



Portable FRL Systems from 1/2" to 1-1/2" NPT