




1" & 1-1/2" IMPACT WRENCHES



KPT-385SLA 1" sq.drive (with 8" Long anvil)

KPT-385SA (with 2" short anvil)



Bolt Capacity	32 mm
Sq.Drive	25.4 mm
Working Torque (Max.)	200 - 1,350 (2,200) Nm
Free Speed	5,000 rpm
Air Consumption	11.2 l/s
Dimensions	330 / 530 x 199 x 158 mm
Net Weight	8.6 / 9.8 kg
Air Inlet	1/2"

KPT-329SL 1" sq.drive

(with 8" anvil)



Bolt Capacity	32 mm
Sq.Drive	25.4 mm
Working Torque (Max.)	280 - 1,560 (1,900) Nm
Free Speed	3,400 rpm
Air Consumption	9.44 l/s
Dimensions	533 x 190 x 195 mm
Net Weight	13.0 kg
Air Inlet	1/2"

KPT-355SL 1" sq.drive (with 7.5" Long anvil)

KPT-355S (with 2" short anvil)



Bolt Capacity	38 mm
Sq.Drive	25.4 mm
Working Torque (Max.)	300 - 1,400 (2,000) Nm
Free Speed	3,500 rpm
Air Consumption	9.7 l/s
Dimensions	350 / 510 x 199 x 175 mm
Net Weight	9.0 / 11.0 kg
Air Inlet	1/2"

KPT-386SL 1" sq.drive (with 6" Long anvil)



Light Weight



Bolt Capacity	38 mm
Sq.Drive	25.4 mm
Working Torque (Max.)	200 - 1,470 (1,500) Nm
Free Speed	4,100 rpm
Air Consumption	18.9 l/s
Dimensions	511 x 166 x 176 mm
Net Weight	7.1 kg
Air Inlet	3/8"

KPT-381SL 1" sq.drive (with 8" Long anvil)

KPT-381S (with 2" short anvil)



Bolt Capacity	38 mm
Sq.Drive	25.4 mm
Working Torque (Max.)	860 - 2,000 (2,300) Nm
Free Speed	4,400 rpm
Air Consumption	10.83 l/s
Dimensions	391 / 557 x 197 x 177 mm
Net Weight	10.5 / 12.0 kg
Air Inlet	1/2"

KPT-50SH 1" sq.drive (with 9" Long anvil)


KPT-50SH-2 (with 2" short anvil)



Bolt Capacity	45 mm
Sq.Drive	25.4 mm
Working Torque (Max.)	1,400 - 2,700 (3,200) Nm
Free Speed	2,900 rpm
Air Consumption	13.33 l/s
Dimensions	392 / 580 x 212 x 189 mm
Net Weight	14.2 / 15.5 kg
Air Inlet	1/2"

KPT-450SL 1" sq.drive (with 9" Long anvil)

KPT-450S (with 2" short anvil)

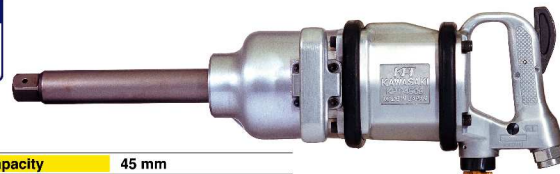

Bolt Capacity	45 mm
Sq.Drive	25.4 mm
Working Torque (Max.)	1,200 - 2,500 (3,200) Nm
Free Speed	3,200 rpm
Air Consumption	14.17 l/s
Dimensions	444 / 632 x 220 x 198 mm
Net Weight	15.1 / 17.1 kg
Air Inlet	1/2"

KPT-500SL 1" sq.drive (with 8" anvil)



Bolt Capacity	46 mm
Sq.Drive	25.4 mm
Working Torque (Max.)	1,700 - 2,700 (3,100) Nm
Free Speed	3,000 rpm
Air Consumption	11.67 l/s
Dimensions	632 x 220 x 198 mm
Net Weight	18.2 kg
Air Inlet	1/2"

KPT-45SD 1" sq.drive (with 8" anvil)



Bolt Capacity	45 mm
Sq.Drive	25.4 mm
Working Torque (Max.)	1,200 - 2,500 (2,700) Nm
Free Speed	2,700 rpm
Air Consumption	13.67 l/s
Dimensions	607 x 220 x 174 mm
Net Weight	17.3 kg
Air Inlet	1/2"

KPT-55SA 1-1/2" sq.drive



Bolt Capacity	55 mm (High tension bolt : 33mm)
Sq.Drive	38.1 mm
Working Torque (Max.)	1,500 - 4,200 (5,500) Nm
Free Speed	3,000 rpm
Air Consumption	14.17 l/s
Dimensions	553 x 220 x 182 mm
Net Weight	18.1 kg
Air Inlet	1/2"