




1" & 1-1/2" IMPACT WRENCHES



KPT-385SLA 1" sq.drive (with 8" Long anvil)

KPT-385SA (with 2" short anvil)



| | |
|-----------------------|--------------------------|
| Bolt Capacity | 32 mm |
| Sq.Drive | 25.4 mm |
| Working Torque (Max.) | 200 - 1,350 (2,200) Nm |
| Free Speed | 5,000 rpm |
| Air Consumption | 11.2 l/s |
| Dimensions | 330 / 530 x 199 x 158 mm |
| Net Weight | 8.6 / 9.8 kg |
| Air Inlet | 1/2" |

KPT-329SL 1" sq.drive

(with 8" anvil)



| | |
|-----------------------|------------------------|
| Bolt Capacity | 32 mm |
| Sq.Drive | 25.4 mm |
| Working Torque (Max.) | 280 - 1,560 (1,900) Nm |
| Free Speed | 3,400 rpm |
| Air Consumption | 9.44 l/s |
| Dimensions | 533 x 190 x 195 mm |
| Net Weight | 13.0 kg |
| Air Inlet | 1/2" |

KPT-355SL 1" sq.drive (with 7.5" Long anvil)

KPT-355S (with 2" short anvil)



| | |
|-----------------------|--------------------------|
| Bolt Capacity | 38 mm |
| Sq.Drive | 25.4 mm |
| Working Torque (Max.) | 300 - 1,400 (2,000) Nm |
| Free Speed | 3,500 rpm |
| Air Consumption | 9.7 l/s |
| Dimensions | 350 / 510 x 199 x 175 mm |
| Net Weight | 9.0 / 11.0 kg |
| Air Inlet | 1/2" |

KPT-386SL 1" sq.drive (with 6" Long anvil)



Light Weight



| | |
|-----------------------|------------------------|
| Bolt Capacity | 38 mm |
| Sq.Drive | 25.4 mm |
| Working Torque (Max.) | 200 - 1,470 (1,500) Nm |
| Free Speed | 4,100 rpm |
| Air Consumption | 18.9 l/s |
| Dimensions | 511 x 166 x 176 mm |
| Net Weight | 7.1 kg |
| Air Inlet | 3/8" |

KPT-381SL 1" sq.drive (with 8" Long anvil)

KPT-381S (with 2" short anvil)



| | |
|-----------------------|--------------------------|
| Bolt Capacity | 38 mm |
| Sq.Drive | 25.4 mm |
| Working Torque (Max.) | 860 - 2,000 (2,300) Nm |
| Free Speed | 4,400 rpm |
| Air Consumption | 10.83 l/s |
| Dimensions | 391 / 557 x 197 x 177 mm |
| Net Weight | 10.5 / 12.0 kg |
| Air Inlet | 1/2" |

KPT-50SH 1" sq.drive (with 9" Long anvil)


KPT-50SH-2 (with 2" short anvil)



| | |
|-----------------------|--------------------------|
| Bolt Capacity | 45 mm |
| Sq.Drive | 25.4 mm |
| Working Torque (Max.) | 1,400 - 2,700 (3,200) Nm |
| Free Speed | 2,900 rpm |
| Air Consumption | 13.33 l/s |
| Dimensions | 392 / 580 x 212 x 189 mm |
| Net Weight | 14.2 / 15.5 kg |
| Air Inlet | 1/2" |

KPT-450SL 1" sq.drive (with 9" Long anvil)

KPT-450S (with 2" short anvil)

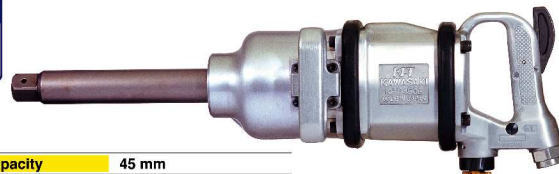

| | |
|-----------------------|--------------------------|
| Bolt Capacity | 45 mm |
| Sq.Drive | 25.4 mm |
| Working Torque (Max.) | 1,200 - 2,500 (3,200) Nm |
| Free Speed | 3,200 rpm |
| Air Consumption | 14.17 l/s |
| Dimensions | 444 / 632 x 220 x 198 mm |
| Net Weight | 15.1 / 17.1 kg |
| Air Inlet | 1/2" |

KPT-500SL 1" sq.drive (with 8" anvil)



| | |
|-----------------------|--------------------------|
| Bolt Capacity | 46 mm |
| Sq.Drive | 25.4 mm |
| Working Torque (Max.) | 1,700 - 2,700 (3,100) Nm |
| Free Speed | 3,000 rpm |
| Air Consumption | 11.67 l/s |
| Dimensions | 632 x 220 x 198 mm |
| Net Weight | 18.2 kg |
| Air Inlet | 1/2" |

KPT-45SD 1" sq.drive (with 8" anvil)



| | |
|-----------------------|--------------------------|
| Bolt Capacity | 45 mm |
| Sq.Drive | 25.4 mm |
| Working Torque (Max.) | 1,200 - 2,500 (2,700) Nm |
| Free Speed | 2,700 rpm |
| Air Consumption | 13.67 l/s |
| Dimensions | 607 x 220 x 174 mm |
| Net Weight | 17.3 kg |
| Air Inlet | 1/2" |

KPT-55SA 1-1/2" sq.drive



| | |
|-----------------------|----------------------------------|
| Bolt Capacity | 55 mm (High tension bolt : 33mm) |
| Sq.Drive | 38.1 mm |
| Working Torque (Max.) | 1,500 - 4,200 (5,500) Nm |
| Free Speed | 3,000 rpm |
| Air Consumption | 14.17 l/s |
| Dimensions | 553 x 220 x 182 mm |
| Net Weight | 18.1 kg |
| Air Inlet | 1/2" |