



The FinishPro 35 angled finish nailer's lightweight, well-balanced construction enables the users to work all day by reducing fatigue and increasing productivity. The FinishPro 35 drives 1-1/4" to 2-1/2" finish nails for maximum versatility.

### Applications:

Cabinets, interior trim, bookshelves, door casements, crown molding, chair rails, exterior trim

### Features and Benefits:


- Adjustable depth-of-drive
- Adjustable exhaust
- Easy-clear latch to clear jams fast
- Full soft grip – for comfort and control
- No-mar pad – to protect work materials
- Available in dual action or restrictive fire
- One-year warranty
- Includes case, fitting, oil, and fastener rebate


### Tool Specifications:

Tool Weight: 4.7 lbs (2.1 kg)  
Height: 11.9" (302 mm)  
Length: 13.4" (340 mm)  
Nail Capacity: 110  
Reg. Operating Pressure: 70-120 psig  
Mode of Operation: Available with either Dual Action or Restrictive Trigger activating mechanisms

### Fastener Specifications:

Gauge: 15  
Fastener Range: 1-1/4" – 2-1/2"  
Finish: Bright Basic/Galvanized



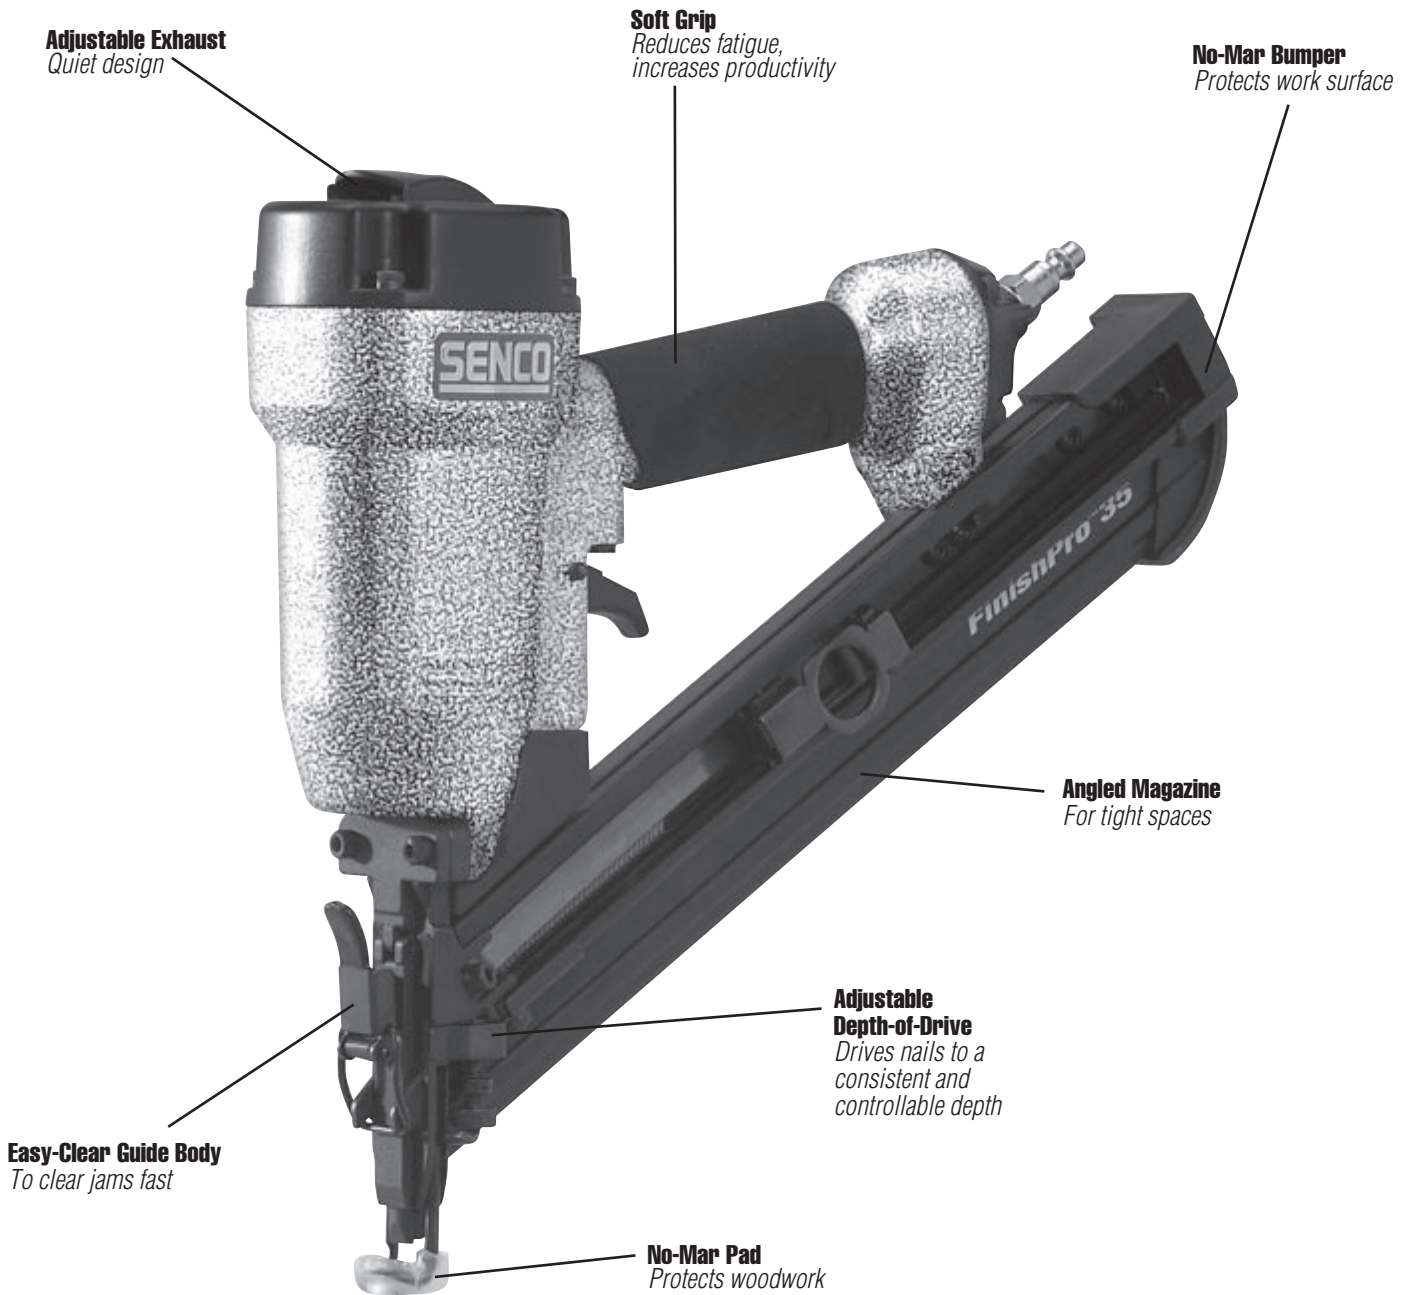

Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions or contact Senco for more information on our trigger systems. Choose the right trigger system for your specific needs! For additional information on how Senco Fastening Solutions will save you time, reduce costs, and increase quality, call our toll-free Action Line: 1-800-543-4596 to find your nearest Authorized Senco Dealer or Distributor. Visit our web site at: [www.senco.com](http://www.senco.com)

**Sequential Actuation Trigger** (also known as restrictive trigger or trigger fire) operates in the following a sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

**Contact Actuation Trigger** (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.